

Fig.47.PF Bronze Check Valve

FEATURES AND BENEFITS

- Check valve complete with Press-Fit connectors
- Permits flow in one direction & automatically closes if flow reverses
- Supplied as one integral unit means less joints to make on-site
- The performance, exact dimensions & tolerances are known in advance
- Incorporates both Hattersley and proven Geberit Mapress technology
- Vibration tested to DVGW and bend tested to BS EN 331
- Quickly and easily installed using a Press-Fit tool (supplied by others)



Fig.47.PF



Fig.47.PF Pressed


MATERIALS

No.	Component	Material	Specification
1	Body	Bronze	BS EN 1982 CC491K
2	Cap	Bronze	BS EN 1982 CC491K
3	Disc - 1/2" - 1"	Brass	BS EN12164 CW614N
	Disc - 1/4" - 2"	Bronze	BS EN 1982 CC491K
4	Hinge	Bronze	BS EN 1982 CC491K
5	Hinge Pin	Stainless Steel	BS970 GR316S11
6	Hinge Nut	Brass	BS EN12164 CW614N
7	Press-Fit Connector	Bronze	BS EN 1982 CC499K
8	Joint 'O' Ring	EPDM Rubber	WRAS Approved
9	Connector 'O' Ring	CIIR Butyl Rubber	WRAS Approved

DIMENSIONS AND WEIGHTS

Size (mm)	Dimensions (mm)					Weight (Kg)
	A	B	C	D	ØE	
½ x 15	59.5	33	104.1	65.1	15	0.42
½ x 18	59.5	38	105.5	66.5	18	0.42
¾ x 22	68.0	42	119.0	78.0	22	0.57
1 x 28	81.5	49	133.1	88.1	28	0.70
1 ¼ x 35	93.2	56	151.6	100.6	35	1.31
1 ½ x 42	98.3	65	166.5	107.5	42	1.73
2 x 54	110.6	76	191.6	122.6	54	2.65

DIMENSIONAL DRAWING

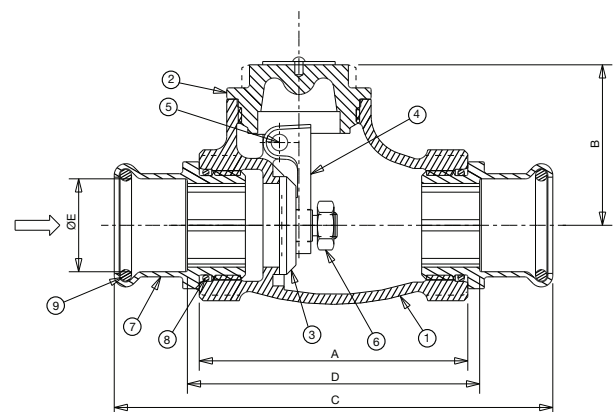

Pressure Rating: PN16 Temperature Range: -10 to 120 °C

Hattersley Fig.47.PF Specification Clause: Bronze (BS 1982 CC491K) Check Valve, swing type to BS 5154 series 'B'. Metal disk, free to rotate and hinge pin mounted. Screwed-in cap. Integral seat. Complete with Geberit Mapress bronze Press-Fit adaptors. Rated PN16, (Maximum temperature 120 deg C).