


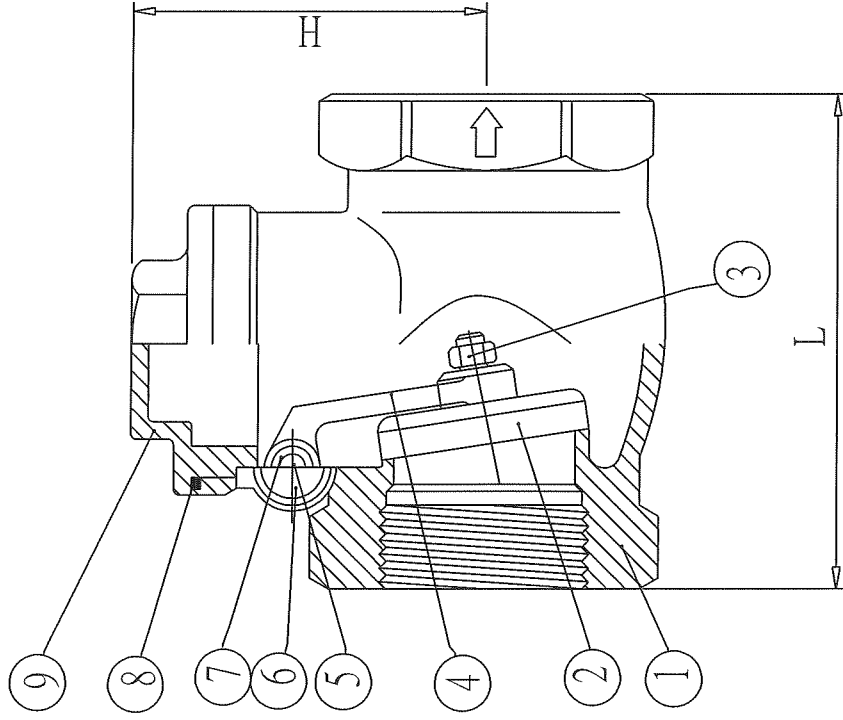

FEATURES

- * The thread ends conform to ASME B1.20.(NPT)
- * DIN 2999 & BS 21 ISO 228/1 & ISO 7/1
- * Investment casting ASTM-A351
- * 600 PSI Working Pressure
- * Thread Cap, Swing type disc. Integral Seat.
- * Thread end:BSPT, BSP, NPT, Din259/2999
- * Y patten (option)
- * 100% tested air-under water at 100PSI

SIZE VALVE	1/2	1/4	1	1-1/4	1-1/2	2	2-1/2	3
H	41.5	46	49	53.5	58.5	67	105	125
L	60	78	84	94	104	122	153	175
WEIGHT/KGS	0.29	0.53	0.69	0.85	1.20	1.80	3.50	5.00

NO.	NAME OF PARTS	MATERIAL	Q'TY
1	BODY	304; 316; CF8M	1
2	DISC	304; 316; CF8M	1
3	DISC NUT	304	1
4	CONNECTING ROD	304; 316; CF8M	1
5	PIN	304; 316	1
6	BLOT	304	1
7	BLOT WASHER	TEFLON	1
8	GASKET	TEFLON	1
9	CAP	304; 316; CF8M	1

	DESC	SWING CHECK VALVE 600PSI	DRAWING #	ETG-CK1	
	APPROVED BY.		DATE	09/11/2009	
	DRAWER	Y.J.Lee	MATERIAL		MODIFICATION