



Fig. 1000 - 1000C

DZR Brass Metering Stations **WRAS** PN20 - Series B (Threaded): PN16 (Compression)

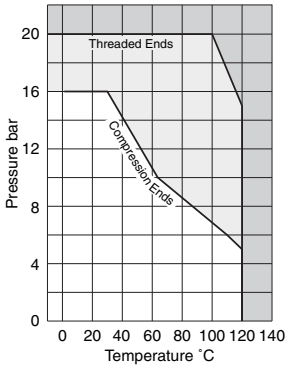

Pressure/Temperature Rating

Threaded Ends

PN20 Series B
 15 bar at 120°C
 20 bar from -10 to 100°C

Compression Ends

5 bar at 120°C
 6 bar at 110°C
 10 bar at 65°C
 16 bar from 2 to 30°C

Test Pressures (Hydraulic)

Shell: 30 bar

Specification

Kitemarked to BS7350
 WRAS Approved Product
 Supplied fitted with two Fig 631 test points.
 Figure 1000 end connections threaded to BS21 (ISO7) Taper female with the exception of the 1/2in inlet which is parallel.
 Figure 1000C suitable for use with 15mm copper pipe

Material Specification

Component	Material	Specification	
		BS EN	ASTM
Metering Station	DZR Brass	12165 CW602N	B62
Test Point	Fig 631		

Dimensions

Nominal Size	in						
	1/2	3/4	1	1 1/4	1 1/2	2	
	mm						
A (threaded)	57	58	66	72	72	82	
A' (compression)	66						
B	55	61	65	71	73	79	
Weight	kg	0.29	0.30	0.40	0.50	0.54	0.77



Use figure 1000 with figure 1432 to make Commissioning Set 2432. (see page 9)

